Pneumax S.p.A.
24050 LURANO (BG) Italy
Via Cascina Barbellina, 10
Tel 035/4192777
Fax 035/4192740-4192741
http://www.pneumaxspa.com

CAPITALE SOCIALE EUR 2.700.000 I.V.
R.E.A. BERGAMO N. 160798
R.E.A. MILANO N. 931262
COD. FISC. E P. IVA 02893330163
COD. MECC. MI 322178

纽迈司气动器材（上海）有限公司
上海市松江区九新公路800号1幢705室
电话：+86-（0）21-57763100
传真：+86-（0）21-57765355
邮箱：sales@pneumaxchina.com
网址：http://www.pneumaxchina.com

Sales of the components illustrated and described in the present catalogue in Italy and abroad are handled through the organization indicated in the section "Sales Network". The overall dimensions and technical information are provided solely for informative reasons and may be subject to change without notice.

无论在意大利还是海外，此样本中说明和描述的产品由Pneumax "销售网络" 中的机构自行掌控。总体尺寸和技术信息仅供参考，如有改变，恕不通知。

技术特性 2
Technical features

"RAP" **快插接头** 4
"RAP" **Brass push-in fittings**

"RAP OT" **全铜快插接头** 13
"RAP OT" **Brass push-in fittings**

"RAP SS" **316L不锈钢快插接头** 20
"RAP SS" **Stainless Steel 316L push-in fittings**

"Tecno-RAP" **快插接头** 22
"Tecno-RAP" **Push-in fittings**

"Micro-RAP" **紧凑型接头** 38
"Micro-RAP" **Compact fittings**

标准接头 39
Standard fittings

卡套接头 47
Compression fitting

快拧接头 52
Quick fittings

杆，附件及阀 57
Stems, accessories and valves

消音器 60
Silencers

分气块 65
Aluminium manifolds

低噪音喷嘴 67
Low noise spry nozzles

气管 69
Tube

气管辊筒 81
Tube roll drum (reutilizable)

特殊型接头 82
Special version fittings

销售网络 88
Sales network

注意：如所需产品不在样本中，请联系当地分公司。
NOTE: For the items not included in the catalogue, please contact our local offices.

图片,图纸和技术参数未被约束
Pictures, drawings and technical data are not binding

1 推力环.
Thrust ring (synthetic material).

2 阻塞环.
Block ring (synthetic material).

3 新型不锈钢簧片设计.
长效管密封保证.
接头尺寸最小化.
New design stainless steel clamp.
Permanent pipe seal guaranteed.
Fitting dimensions reduced to a minimum.

4 限位环.
Distance ring (synthetic material).

5 RAP系列为镀镍铜材质.
Nickel-plated brass body for Rap model.
Tecno-RAP系列为工程塑料材质.
Technopolymer body for Tecno-Rap model.

6 不含硅的 NBR O型圈.
Silicone-free NBR O-Ring.

7 配合阀及气缸的接口表面.
Exact valve and cylinder spot-facing surfaces.

8 O型圈自有密封槽.
不光滑表面也可密封.
O-Ring seals with own seat.
Improved seal even with unpolished surfaces.

9 螺纹从 M5 至 1/2”.
Threading from M5 to 1/2”.

10 内六角便于在狭小空间装配.
Internal hexagon to facilitate assembly in limited spaces.

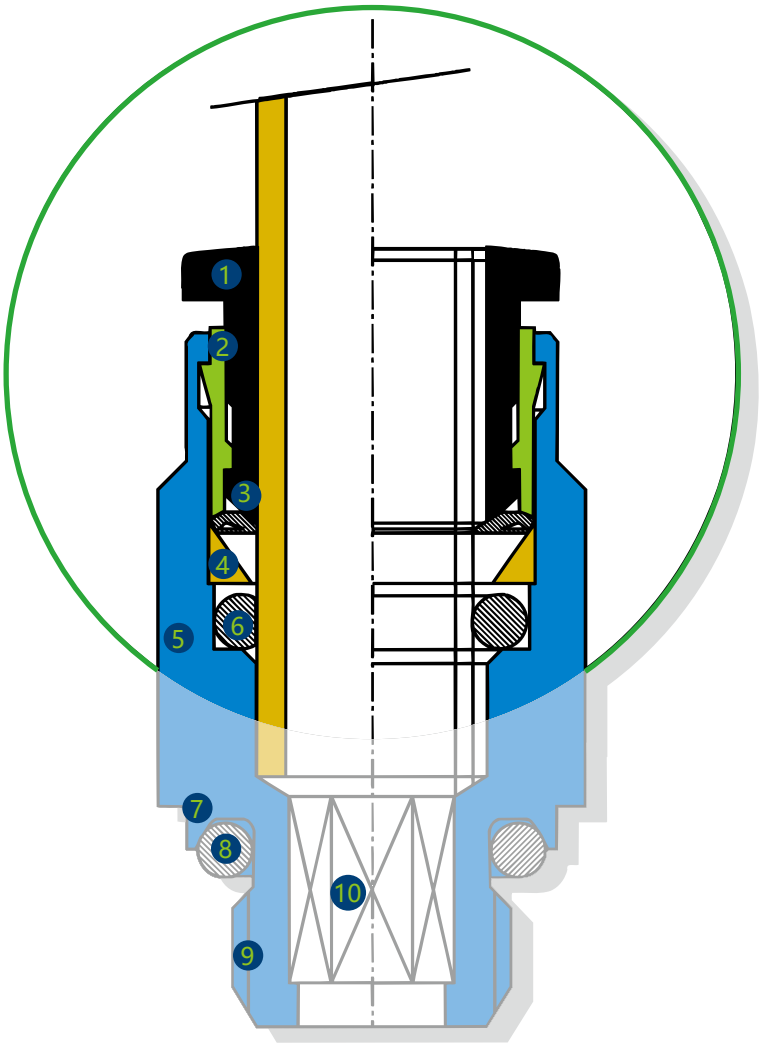

图片,图纸和技术参数未被约束
Pictures, drawings and technical data are not binding

快插接头的技术参数

Ø 气管外径 mm	Ø 气管内径 mm	在标准软管中的测试压力（bar） -20°C +30°C		+31°C +50°C		+51°C +70°C
		Rap	Tecno-Rap	Rap	Tecno-Rap	Rap
4	2	18	12	18	12	18
6	4	18	12	15	12	15
8	6	15	12	15	12	11
10	8	14	10	12	10	8
12	10	14	10	12	10	8
14	12	12	-	10	-	6

PA11和PA12气管的公差

Ø 气管外径	Ø 外径公差	
4 至 5 mm	+0.05	-0.08
6 至 14 mm	+0.05	-0.1

PU气管的公差

Ø 气管外径	Ø 外径公差	
4 至 14 mm	+0.15	-0.1

技术参数

温度范围: Rap -20°C ~+70°C
Rap OT -20°C ~+70°C
Tecno-Rap -20°C ~+50°C

介质: 压缩空气(其它另询)

主要材料:

	Rap	Rap OT	Tecno-RAP
本体	镀镍黄铜 H58	镀镍黄铜 H58	工程塑料
密封件	无硅NBR	无硅NBR	无硅NBR
簧片	AISI304	AISI304	AISI304
推力环	合成材料	镀镍黄铜 H58	合成材料

螺纹: 含O型圈管螺纹 BSP UNI-ISO 228/1
特氟龙锥螺纹 BSPT UNI-ISO 7/1

主要特性

1 满额流量
2 单手操作
3 适用于聚酰胺，聚氨酯，尼龙及聚乙烯气管
4 极其紧凑
5 结实轻巧
6 复杂管路系统的模块化安装
7 密封槽含O型圈，确保密封光滑平面
8 适用于真空

TECHNICAL DATA FOR PUSH-IN FITTINGS

Outside pipe diameter mm	Inside pipe diameter mm	Working pressure in bar tested with standard air hoses -20°C +30°C		+31°C +50°C		+51°C +70°C
		Rap	Tecno-Rap	Rap	Tecno-Rap	Rap
4	2	18	12	18	12	18
6	4	18	12	15	12	15
8	6	15	12	15	12	11
10	8	14	10	12	10	8
12	10	14	10	12	10	8
14	12	12	-	10	-	6

TOLERANCES FOR PA11 AND PA12 PIPES

Outside pipe diameter	Outside pipe diameter tolerance	
4 and 5 mm	+0.05	-0.08
from 6 to14 mm	+0.05	-0.1

TOLERANCES FOR POLYURETHANE (PU) PIPES

Outside pipe diameter	Outside pipe diameter tolerance	
from 4 to14 mm	+0.15	-0.1

TECHNICAL DATA

Working temperature: Rap -20°C +70°C
Rap OT -20°C ~+70°C
Tecno-Rap -20°C +50°C

Fluid: Compressed air (other fluids on request)

Main material:

	Rap	Rap OT	Tecno-RAP
Body	Nickel-plated brass	Nickel-plated brass	Technopolymer
Gaskets	Silicone-free NBR	Silicone-free NBR	Silicone-free NBR
Clamp	AISI304	AISI304	AISI304
Ring	Synthetic Material	Nickel-plated brass	Synthetic Material

Filettatura: Cylindrical BSP with O-Ring UNI-ISO 228/1
Tefloned BSPT taper thread UNI-ISO 7/1

MAIN FEATURES

1 Full flow
2 Can be inserted and extracted with one hand
3 Suitable for tubes Rilsan, Polyurethane, Nylon, Polyethylene
4 Supercompact
5 Extremely lightweight yet sturdy
6 Modular assembly for complex pipe systems
7 O-Ring provided with his own seat to ensure seal with polished surfaces
8 Suitable for vacuum appliction

图片,图纸和技术参数未被约束
Pictures, drawings and technical data are not binding



ART. 01 直通外螺纹（G）Straight male adaptor (parallel)

CODICE	ØD	G	ØC	ØB	H	L		O	
0104M5	4	M5		10	3.5	20.5	10	2	
0104M6	4	M6		10	4	20.5	10	2	
010418	4	1/8		14	5.5	19.5	10	3	
010414	4	1/4		17	7.5	18.6	10	3	
010438	4	3/8		20	7.5	19.6	10	3	
0106M5	6	M5		12	3.5	22.8	12	2	
0106M6	6	M6		12	4	22.8	12	2	
010618	6	1/8		14	5.5	22	12	4	
010614	6	1/4		17	7.5	22.5	12	4	
010638	6	3/8		20	7.5	20.3	12	4	
010612	6	1/2		24	10	23	12	4	
010818	8	1/8		14	5.5	25	14	4	
010814	8	1/4		17	7.5	24	14	5	
010838	8	3/8		20	7.5	20.5	14	6	
010812	8	1/2		24	10	24	14	6	
011018	10	1/8		14	5.5	29	17	4	
011014	10	1/4		17	7.5	30.5	17	6	
011038	10	3/8		20	7.5	27	17	8	
011012	10	1/2		24	10	30	17	8	
011218	12	1/8		14	5.5	30	21	4	
011214	12	1/4		17	7.5	33	21	6	
011238	12	3/8		20	7.5	28	21	8	
011212	12	1/2		24	10	30.5	21	8	
011638	16	3/8		20	7.5	35	24	8	
011612	16	1/2		24	10	37	24	10	

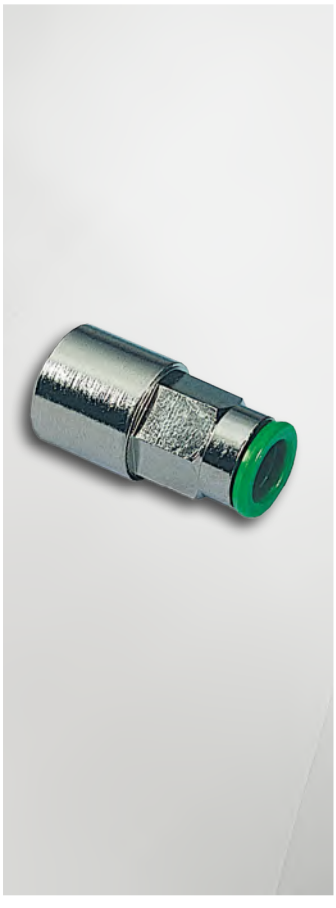

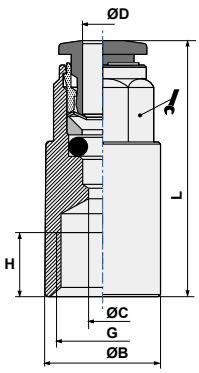

ART. 02 直通内螺纹 Straight female adaptor

CODICE	ØD	G	ØC	ØB	H	L		O	
0204M5	4	M5		10	5.5	21	10		
0204M6	4	M6		10	6	21.5	10		
020418	4	1/8		10	8.5	24	14		
020414	4	1/4		10	11	26.5	17		
0206M5	6	M5		12	5.5	21.5	12		
0206M6	6	M6		12	6	22	12		
020618	6	1/8		12	8.5	24.5	14		
020614	6	1/4		12	11	27	17		
020638	6	3/8		12	12	28	21		
020612	6	1/2		12	14	30	24		
020818	8	1/8		14	8.5	26	14		
020814	8	1/4		14	11	28.5	17		
020838	8	3/8		14	12	29.5	21		
020812	8	1/2		14	14	31.5	24		
021018	10	1/8		17	8.5	29.5	17		
021014	10	1/4		17	11	32.7	17		
021038	10	3/8		17	12	33	21		
021012	10	1/2		17	14	35.7	24		
021218	12	1/8		20	8.5	31	21		
021214	12	1/4		20	11	33.5	21		
021238	12	3/8		20	12	34.5	21		
021212	12	1/2		20	14	36.5	24		
021638	16	3/8		24	12	36.5	24		
021612	16	1/2		24	14	38.5	24		

ART. 03 直通变径 Straight connector

CODICE	ØD	ØD1	ØB		ØC	L			
030400	4	4	3		11	32			
030600	6	6	5		13	36.1			
030800	8	8	7		15	38			
031000	10	10	9		18	42.3			
031200	12	12	11		21	45.8			



ART. 04 L型 Elbow connector

CODICE	ØD		ØC	ØB		L			
040400	4		3	10		19			
040600	6		5	11		20.6			
040800	8		7	13		23			
041000	10		8	16		26.4			
041200	12		10	19		28.9			



ART. 05 T型 T connector

CODICE	ØD		ØC	ØB		L			
050400	4		3	9		17.3			
050600	6		5	11		20.6			
050800	8		7	13		23			
051000	10		8	16		26.4			
051200	12		10	19		28.9			



ART. 06 螺纹杆状（短） Adaptor parallel (short)

CODICE	ØB	F	ØA	ØC	ØD	H	L		
0604M5	4	M5	8	2	2	4	24.7	8	
0604M6	4	M6	9	2	2	5	25.7	8	
060418	4	1/8	13	5.5	2	5.5	27.7	13	
060414	4	1/4	16	7.5	2	6.5	29.2	13	
0606M5	6	M5	8	2.6	2.6	4	27.5	8	
0606M6	6	M6	9	2.6	2.6	5	29	8	
060618	6	1/8	13	5.5	4	5.5	30.5	13	
060614	6	1/4	16	7.5	4	6.5	32	13	
060818	8	1/8	13	6	6	5.5	32	13	
060814	8	1/4	16	7.5	6	6.5	33.5	13	
060838	8	3/8	20	9	6	7.5	35.5	13	
061018	10	1/8	13	6	6	5.5	35	13	
061014	10	1/4	16	8	8	6.5	36.5	13	
061038	10	3/8	20	8	8	7.5	39.5	13	
061214	12	1/4	16	8	8	6.5	37.5	13	
061238	12	3/8	20	11	10	7.5	40.5	13	
061212	12	1/2	24	13	10	9	42	16	

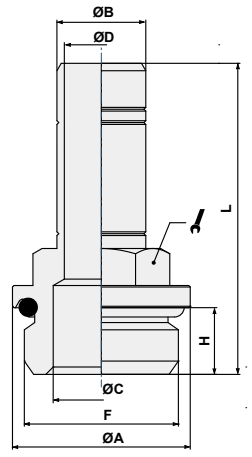

ART. 06F 内螺纹杆状 Female parallel adaptor

CODICE	ØD	G	ØC	B	H	L			
06F0418	4	1/8	2	7	16.7	29.7		12	
06F0618	6	1/8	4	7	19.5	32.5		12	
06F0614	6	1/4	4	8	19.5	35.5		17	
06F0814	8	1/4	6	8	21	37		17	



图片,图纸和技术参数未被约束
Pictures, drawings and technical data are not binding

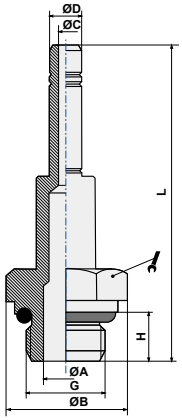

ART. 60 螺纹杆状（长） Adaptor parallel (long)

CODICE	ØD	G	ØC	ØB	H	L	ØA		
600418	4	1/8	2	13	5.5	39.2	6	13	
600618	6	1/8	4	13	5.5	45	6	13	
600614	6	1/4	4	16	6.5	47.5	7.5	13	
600818	8	1/8	6	13	5.5	48.5	6	13	
600814	8	1/4	6	16	6.5	51	7.5	13	
600838	8	3/8	6	20	7.5	51.5	9	13	
601014	10	1/4	8	16	6.5	54	7.5	13	
601038	10	3/8	8	13	7.5	57.5	9	13	

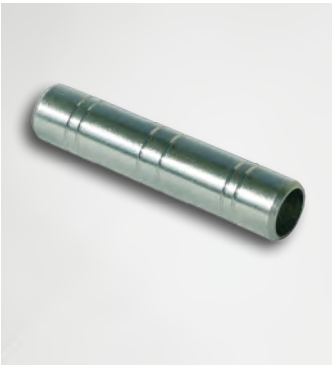



ART. 07 连接杆 Connector

CODICE	ØD		ØC		L	
070400	4		2		33.4	
070600	6		4		39	
070800	8		6		49	
071000	10		8		48	



ART. 08 直通变径杆状 Plug-in reducer

CODICE	ØD1	ØD2		ØB	L	
080604	6	4		10	35	
080804	8	4		10	34	
080806	8	6		12	36	
081006	10	6		12	41	
081008	10	8		14	42	
081208	12	8		14	42.5	
081210	12	10		17	46	



ART. 08/E 直通变径杆状 Plug-in increaser

CODICE	ØD1	ØD2		ØB	L	
08E0406	4	6		11	35.5	
08E0608	6	8		13	39	



ART. 09 堵头 Plug

CODICE	ØD	ØB			L	
090400	4	5			26	
090600	6	7			29	
090800	8	9			31.5	
091000	10	11			35	

图片,图纸和技术参数未被约束
Pictures, drawings and technical data are not binding

ART. 10 穿板直通 Bulkhead connector

CODICE	ØD	ØC	M	Imax	L		
100400	4		12x1	9.5	30.5	14	
100600	6		14x1	7.5	31	17	
100800	8		16x1	6.5	34.5	19	
101000	10		20x1	11.5	41.5	24	
101200	12		22x1	12.5	44.5	26	



ART. 13 套筒接头 Single banjo body

CODICE	ØD	G*	ØA	ØB	H	L	
1304M5	4	M5	5	8	9	19.5	
130418	4	1/8	9.9	14	15	21.1	
130618	6	1/8	9.9	14	15	24.3	
130614	6	1/4	13.3	18	17	25.5	
130818	8	1/8	9.9	14	15	24.8	
130814	8	1/4	13.3	18	17	26.5	
130838	8	3/8	16.75	21	20	28	
131014	10	1/4	13.3	18	17	28.4	
131038	10	3/8	16.75	21	20	29.9	
131214	12	1/4	13.3	18	17	30.9	
131238	12	3/8	16.75	21	20	31.4	
131212	12	1/2	21	26	24	34.9	

(*) G = 杆头螺纹
(*) G = steam thread



ART. 14 双头套筒接头 Double banjo body

CODICE	ØD	G*	ØA	ØB	H	L			
1404M5	4	M5	5	8	9	19.5			
140418	4	1/8	9.9	14	15	21.1			
140618	6	1/8	9.9	14	15	24.3			
140614	6	1/4	13.3	18	17	25.5			
140818	8	1/8	9.9	14	15	24.8			
140814	8	1/4	13.3	18	17	26.5			
140838	8	3/8	16.75	21	20	28			
141014	10	1/4	13.3	18	17	28.4			
141038	10	3/8	16.75	21	20	29.9			
141214	12	1/4	13.3	18	17	30.9			
141238	12	3/8	16.75	21	20	31.4			
141212	12	1/2	21	26	24	34.9			

(*) G =杆头螺纹
(*) G = steam thread

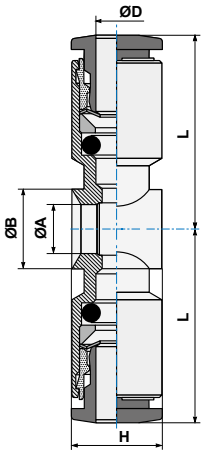



ART. 15

L型可转接头
Complete single banjo (rotating under pressure)

CODICE	ØD	G	ØA	H	L1	L		O	
1504M5	4	M5	2	4	16.8	19.5		2.5	
1504M6	4	M6	2	4	17.8	19.5		2.5	
150418	4	1/8	5.5	5.5	25	21.1		3	
1506M5	6	M5	2	4	16.5	22		2.5	
150618	6	1/8	5.5	5.5	24.5	24.3		3	
150614	6	1/4	7.8	6.5	28	25.5		4	
150818	8	1/8	5.5	5.5	24.5	24.8		3	
150814	8	1/4	7.8	6.5	28	26.5		4	
150838	8	3/8	10	7.5	34	28		5	
151014	10	1/4	7.8	6.5	28	28.4		4	
151038	10	3/8	10	7.5	34	29.9		5	
151214	12	1/4	7.8	6.5	28	30.9		4	
151238	12	3/8	10	7.5	34	31.4		5	
151212	12	1/2	12	9	40.8	34.9		8	



ART. 15A

单位接头杆
Single stem for swivel banjo

CODICE	G	L	ES.	H		
15AM5	M5	17	2.5	4		
15AM6	M6	18	2.5	5		
15A18	1/8	24.5	3	5.5		
15A14	1/4	28	4	6.5		
15A38	3/8	32.5	5	7.5		
15A12	1/2	39	8	10		

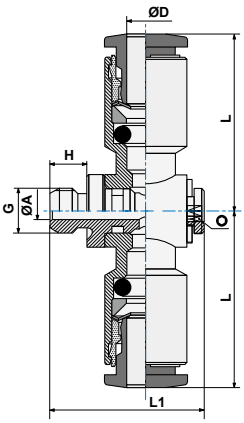

ART. 16

T型可转接头
Complete double banjo (rotating under pressure)

CODICE	ØD	G	ØA	H	L1	L		O	
1604M5	4	M5	2	4	16.8	19.5		2.5	
160418	4	1/8	5.5	5.5	24.5	21.1		3	
160618	6	1/8	5.5	5.5	24.5	24.3		3	
160614	6	1/4	7.8	6.5	28	25.5		4	
160818	8	1/8	5.5	5.5	25	24.8		3	
160814	8	1/4	7.8	6.5	28	26.5		4	
160838	8	3/8	10	7.5	34	28		5	
161014	10	1/4	7.8	6.5	28	28.4		4	
161038	10	3/8	10	7.5	34	29.9		5	
161214	12	1/4	7.8	6.5	28	30.9		4	
161238	12	3/8	10	7.5	34	31.4		5	
161212	12	1/2	12	9	40.8	34.9		8	

图片,图纸和技术参数未被约束
Pictures, drawings and technical data are not binding

ART. 19 L型外螺纹 Elbow male adaptor

CODICE	ØD	G	ØB	E	L		
190418	4	1/8	9	18.6	16.5	10	
190618	6	1/8	11	23.8	16.5	10	
190614	6	1/4	11	25.3	22.5	11	
190818	8	1/8	13	25.5	18.5	11	
190814	8	1/4	13	25.5	22	11	
191014	10	1/4	16	28	24	13	



ART. 20 T型中间外螺纹 Swivel male stud tee parallel

CODICE	ØD	A	H	ØB	L1	L2		
2004M5	4	M5	4	9	17.3	20	8	
200418	4	1/8	5.5	11.4	17.3	18.5	13	
200414	4	1/4	6.5	9	19.0	22.5	16	
200618	6	1/8	5.5	11	19.5	18.5	13	
200614	6	1/4	6.5	11	22.1	22.5	16	
200818	8	1/8	5.5	13	23.0	20.5	13	
200814	8	1/4	6.5	13	23.0	22.5	16	
200838	8	3/8	7.5	13	24.5	25.5	18	
201014	10	1/4	6.5	16	26.4	24.5	16	
201038	10	3/8	7.5	16	26.4	25.5	18	



ART. 21 T型侧边外螺纹 Swivel male branch tee parallel

CODICE	ØD	A	H	ØB	L1	L2		
2104M5	4	M5	4	9	17.3	20	8	
210418	4	1/8	5.5	9	17.3	18.5	13	
210414	4	1/4	6.5	9	19.0	22.5	16	
210618	6	1/8	5.5	11	20.6	18.5	13	
210614	6	1/4	6.5	11	22.1	22.5	16	
210818	8	1/8	5.5	13	23.0	20.5	13	
210814	8	1/4	6.5	13	23.0	22.5	16	
210838	8	3/8	7.5	13	24.5	25.5	18	
211014	10	1/4	6.5	16	26.4	24.5	16	
211038	10	3/8	7.5	16	26.4	25.5	18	

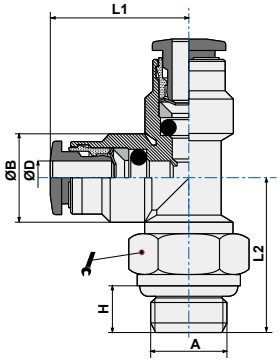

图片,图纸和技术参数未被约束
Pictures, drawings and technical data are not binding



ART. 22

L型外螺纹（矮）
Swivel elbow male adaptor parallel

CODICE	ØD	A	H	ØB	L1	L2		
2204M5	4	M5	4	9	17.3	20	8	
220418	4	1/8	5.5	9	17.3	18.5	13	
220414	4	1/4	6.5	9	19	22.5	16	
2206M5	6	M5	4	11	20	20.6	8	
220618	6	1/8	5.5	11	20.6	18.5	13	
220614	6	1/4	6.5	11	22.1	22.5	16	
220638	6	3/8	7.5	11	23	25.5	16	
220612	6	1/2	9	11	23	29	17	
220818	8	1/8	5.5	13	23	20.5	13	
220814	8	1/4	6.5	13	23	22.5	16	
220838	8	3/8	7.5	13	24.5	25.5	18	
220812	8	1/2	9	13	24.5	29	21	
221018	10	1/8	5.5	16	26.4	22.5	16	
221014	10	1/4	6.5	16	26.4	24.5	16	
221038	10	3/8	7.5	16	26.4	25.5	18	
221012	10	1/2	9	17	27.9	29	21	
221214	12	1/4	6.5	19	28.9	24.5	16	
221238	12	3/8	7.5	19	28.9	24.5	18	
221212	12	1/2	9	19	28.9	31	21	



ART. 25

穿板内螺纹
Female bulkhead

CODICE	ØA	C	ØB	D	E	L		
250418	4	1/8	M12x1		8.5	24	14	
250414	4	1/4	M12x1		11	26.5	17	
250618	6	1/8	M14x1		8.5	24.8	17	
250614	6	1/4	M14x1		11	29.5	17	
250638	6	3/8	M14x1		12	30.5	21	
250612	6	1/2	M14x1		14	33	24	
250818	8	1/8	M16x1		8.5	26.5	19	
250814	8	1/4	M16x1		11	32	19	
250838	8	3/8	M16x1		12	34.3	21	
250812	8	1/2	M16x1		14	36.5	24	
251018	10	1/8	M20x1		8.5	30	24	
251014	10	1/4	M20x1		11	32.5	24	
251038	10	3/8	M20x1		12	34	24	
251012	10	1/2	M20x1		14	38	24	
251218	12	1/8	M22x1		8.5	31.5	24	
251214	12	1/4	M22x1		11	34	24	
251238	12	3/8	M22x1		12	35	24	
251212	12	1/2	M22x1		14	37	24	

图片,图纸和技术参数未被约束
Pictures, drawings and technical data are not binding

ART. 27 内套筒 Cartrige

CODICE	ØD	ØC	ØB		H		
270400	4	2.9	7.8		14		
270600	6	4.5	10		16		
270800	8	6.5	12		17		



ART. 28 进气节流阀 Unidirectional flow regulator for valve

CODICE	ØD	G	ØA	H	L1	L		
2804M5	4	M5	1.9	4	19.5	21.5	10	
280418	4	1/8	5.5	5.5	21.1	34	14	
280618	6	1/8	5.5	5.5	24.3	34	14	
280614	6	1/4	6	6.5	25.5	42	17	
280818	8	1/8	5.5	5.5	24.8	34	14	
280814	8	1/4	6	6.5	26.5	42	17	
280838	8	3/8	8	7.5	28	52	20	
281014	10	1/4	6	6.5	28.4	42	17	
281038	10	3/8	8	7.5	29.9	52	20	
281238	12	3/8	8	7.5	31.4	52	20	

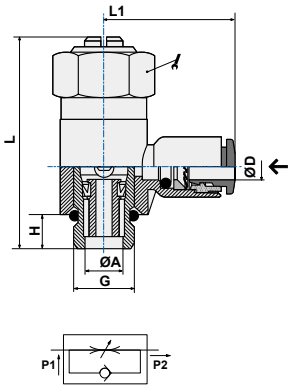

ART. 29 排气节流阀 Unidirectional flow regulator for cylinder

CODICE	ØD	G	ØA	H	L1	L		
2904M5	4	M5	1.9	4	19.5	21.5	10	
290418	4	1/8	5	5.5	21.1	34	14	
2906M5	6	M5	1.9	4	22.5	21.5	10	
290618	6	1/8	5	5.5	24.3	34	14	
290614	6	1/4	6	6.5	25.5	42	17	
290818	8	1/8	5	5.5	24.8	34	14	
290814	8	1/4	6	6.5	26.5	42	17	
290838	8	3/8	6.5	7.5	28	52	20	
291014	10	1/4	6	6.5	28.4	42	17	
291038	10	3/8	6.5	7.5	29.9	52	20	
291238	12	3/8	6.5	7.5	31.4	52	20	
291212	12	1/2	10	9	34.9	61	26	

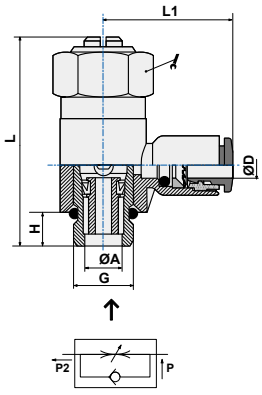

ART. 30 双向节流阀 Bidirectional flow regulator

CODICE	ØD	G	H	L1	L		
300418	4	1/8	5.5	21.1	34	14	
300618	6	1/8	5.5	24.3	34	14	
300614	6	1/4	6.5	25.5	42	17	
300818	8	1/8	5.5	24.8	34	14	
300814	8	1/4	6.5	26.5	42	17	
300838	8	3/8	7.5	28	52	20	
301014	10	1/4	6.5	28.4	42	17	
301038	10	3/8	7.5	29.9	52	20	
301238	12	3/8	7.5	31.4	52	20	
*301212	12	1/2	9	34.9	61	26	

* 含塑料垫片
* with plastic washer

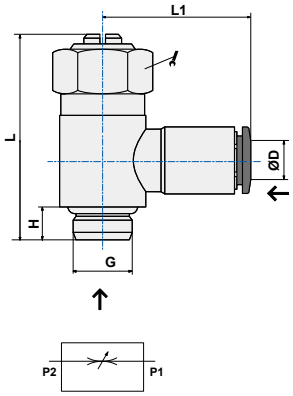



ART. 33 两路输出可转 Swivel double banjo stem

CODICE	ØD	G	ØA	H	L1	L		O	
330418	4	1/8	5.5	5.5	43.8	21.1	14	3	
330618	6	1/8	5.5	5.5	43.8	24.3	14	3	
330818	8	1/8	5.5	5.5	43.8	24.8	14	3	
330614	6	1/4	7.8	7.5	51.5	25.5	18	4	
330814	8	1/4	7.8	7.5	51.5	26.5	18	4	
331014	10	1/4	7.8	7.5	51.5	28.4	18	4	



ART. 33A 双位接头杆 Double stem for swivel banjo

CODICE		G	H	L				O	
33A18		1/8	5.5	43.3			14	3	
33A14		1/4	6.5	50			18	4	

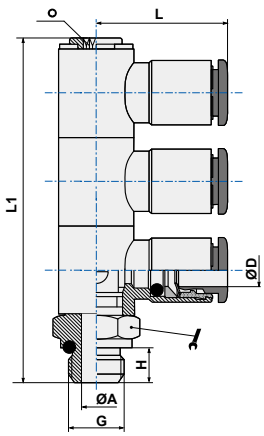

ART. 34 三路输出可转 Swivel triple banjo stem

CODICE	ØD	G	ØA	H	L1	L		O	
340418	4	1/8	5.5	5.5	58.4	21.1	14	3	
340618	6	1/8	5.5	5.5	58.4	24.3	14	3	
340818	8	1/8	5.5	5.5	58.4	24.8	14	3	
340614	6	1/4	7.8	7.5	67	25.5	18	4	
340814	8	1/4	7.8	7.5	67	26.5	18	4	
341014	10	1/4	7.8	7.5	67	51.5	18	4	



ART. 34A 三位接头杆 Triple stem for swivel banjo

CODICE		G	H	L				O	
34A18		1/8	5.5	58.4			14	3	
34A14		1/4	6.5	67.1			18	4	



ART. 28/29/30A 节流阀杆 Positioned flow regulator stem

CODICE	L	ØB	H	G	ØA		
28/29/30AM5	24.0	6	4	M5	5	8	
28/29/30A18	31.5	9.8	7	1/8	13.5	14	
28/29/30A14	38.0	13	8	1/4	17	17	
28/29/30A38	46.5	16.5	9	3/8	21	21	